


说明书, SSM-F200 折后尺寸: 78*112mm 材质: 128g铜版纸 正反面彩色印刷_V1




SSM-F200
User Manual

Thank you for choosing the SSK Wireless Hard Drive SSM-F200.

Please review the following tips carefully to ensure proper set up.

Product interfaces and LED indicator instructions

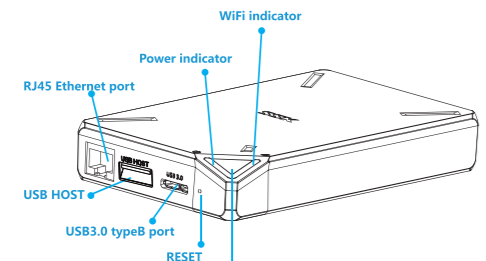

LED indicator color instructions


- Blue: Wifi Indicator, blinking indicates Wifi data transmission
- Yellow: Charging Indicator, blinking indicates charging
- Red: Low Power Indicator, blinking indicates the battery will run out

Quick Settings

Please charge the battery before you using the SSM-F200

Please charge the SSM-F200 via supplied USB cable and USB charger. The yellow LED blinks white charging, and the light is solid yellow indicates that charging is completed.

Note: The USB Charger is not included in the package, you can use USB charger above 5V/1A to charge.

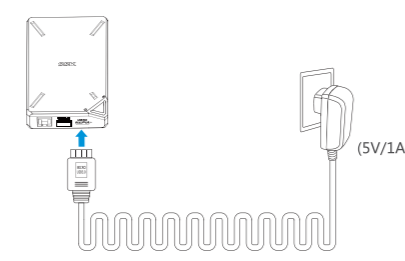

Please format Hard Drive

Supported Hard Drive formats:NTFS/EXFAT

When using SSM-F200 for the first time, do not turn it on, please connect it to computer with the supplied USB cable, and format to NTFS or EXFAT under Disk Management (Windows OS) or Disk Utility(Mac OS). Please don't format via Mobile phone App or format to other formats. (How to format the hard drive, please refer to our official website: Support-- Download Center)


Push the Power button 5-6 seconds, the LED Indicator turns blue, the drive is ready to connect.

Note: After turn on SSM-F200, it will be a Wireless mode. If you want to use as an external hard drive, do not turn on the device, please connect it to computer with the supplied USB cable, then it will be an external hard drive mode, no WiFi signal. Two modes cannot work at the same time.

Wireless connect Mobile phone, Tablet PC or Ipad to SSM-F200


1. SSKCLOUD APP Set up

Download the SSKCloud app to your mobile device from the Apple App Store or the Google Play store (Ensure that your Mobile device has a good internet connection)

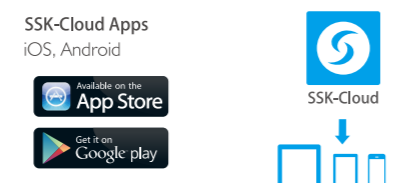


2. On your mobile device, go to Settings > Wi-Fi and connect to the SSKCLOUD_XXXX.

After the connection has been established, open the SSKCloud client App.

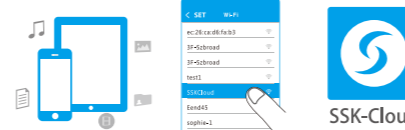

3. The first time you access the App you will need to set the user password. After it has been set you will use it for the user and WiFi password. While accessing the device via MAC or Windows this password will also be the administrator password.


4. The SSKCloud App Home page shows the Hard disk and mobile phone corresponding capacity, which indicates set successfully. After that, you can easily backup and manage data between mobile devices and hard drive.

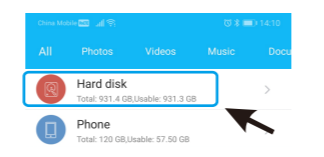


5. After connecting to the SSKCloud WiFi hotspot, you might find that your mobile devices WiFi prompt "No Internet". The reason for this is that the SSKCloud needs to be connected to an internet connection.

Two ways to connect SSKCloud SSM-F200 to internet:

- Wireless connection** (Open SSKCloud APP, Click Settings-Internet Connection-Hotspot-choose the WiFi network and enter the password)

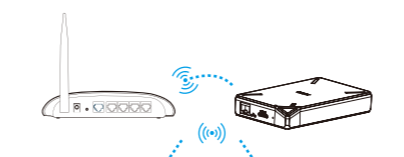


Wired Connection (Connect to router via LAN cable)

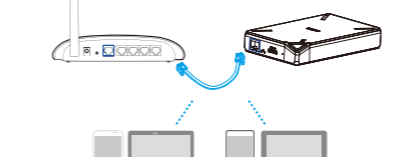

Note: To ensure the best possible access speed, we recommend using a Wired LAN Connection. After the SSM-F200 has been connected to the internet, your mobile phone, tablet PC, or iPad can connect to the router WiFi or the SSKCloud WiFi to access hard drive data and have the internet at the same time.

6. Mobile phone, Tablet PC, or iPad Remote Access to SSM-F200


- Connect SSM-F200 to internet; (How to connect SSM-F200 to internet, please refer to Point 5.)
- Ensure that your Mobile phone, Tablet PC, or iPad has a good internet connection such as 4G or WiFi
- Open SSKCloud App, Settings---Remote Access---Remote Access List --- Choose the Device---input the password and Connect;

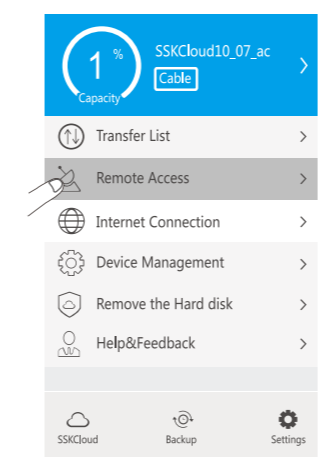

Wireless Connect PC(Windows& Mac) to SSM-F200

1. Wireless Connect PC to SSM-F200 via SAMBA

- Computer (Windows/Mac OS) connect SSM-F200 WiFi Hotspot: Search for the SSKCloud Hotspot and connect to it.

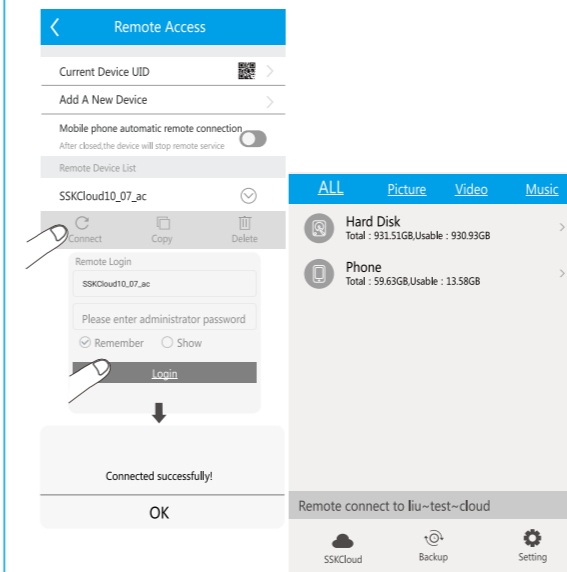


Windows OS Wireless Access to SSM-F200 VIA Samba

Access via Windows Explorer, and input the IP address: \\10.10.10.254


User name: admin

Default Password: admin

If you set the password via the Mobile phone SSKCloud App, then the password would be the same as what you set in the mobile phone app.

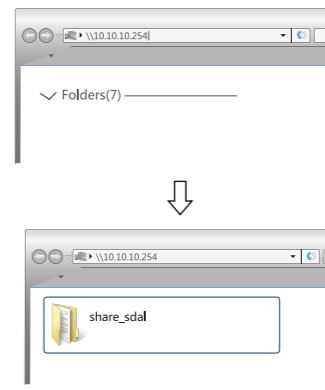

Attention: Please input the IP Address: \\10.10.10.254 on Windows Explorer, please do not input the IP Address on Internet Browser for SAMBA Accessing.

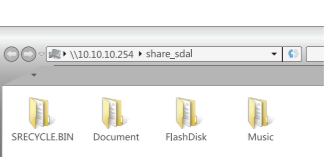

MAC OS Wireless Access to SSM-F200


Open Finder, ---Click Go,---Click Network

Input smb://10.10.10.254

User name: admin


Default Password: admin

If you set the password via the Mobile phone SSKCloud App, then the password would be the same as what you set in the mobile phone app.

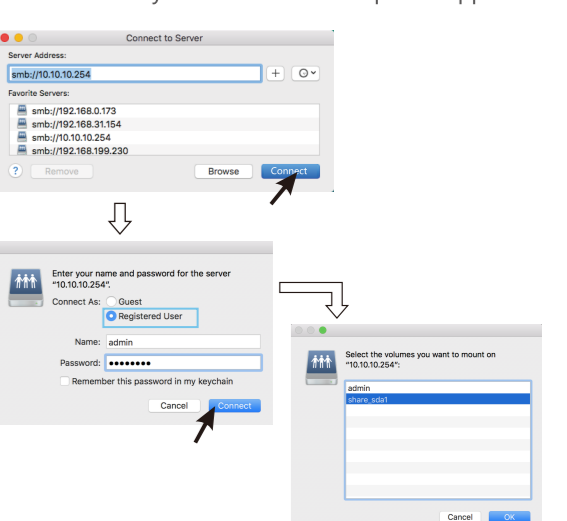


13

Note: SSM-F200 supports the Direct Wireless (AP) Connection and Home Wi-Fi Network Connection. If the SSM-F200 is connected to the router via a lan cable, your computer can connect your Home Wi-Fi Network to access hard drive, just replace the IP address 10.10.10.254 with the WAN IP address assigned to the SSM-F200 (If the SSM-F200 is connected to the router via the wireless bridge option, then the computer needs to connect to the SSM-F200's WiFi hotspot and use IP address 10.10.10.254).

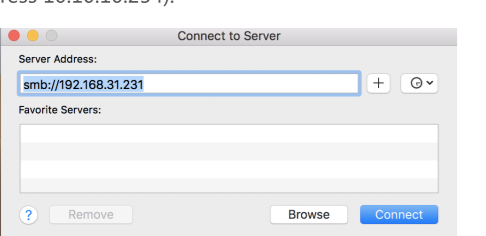

14

How to check the WANIP: Connect your Mobile phone to the same router's WiFi hotspot, SSKCloud APP-Settings.

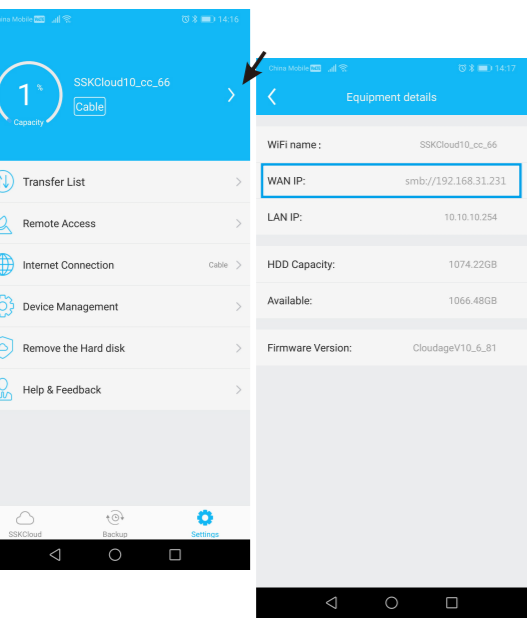

15

2. Wireless Connect PC to SSM-F200 by SSKCloud Software


- Open the Browser, enter the URL: <http://en.ssk.cn/Support/Download/Intelligent/1ndex.html> to download SSKCloud software. According to your operating system, choose the corresponding version to download and install (Windows 32 Bit, 64 Bit, or Mac OS).

Note: All software downloads from our website are compressed. Please unzip it then install.

- Connect to the SSM-F200's WiFi hotspot or the Router's WiFi hotspot. In order to connect to the SSM-F200 remotely you must connect the SSM-F200 to the internet first.
- Run the SSKCloud software, then you will be able to manage the data via local or remote access to the hard drive. If using the remote access, you will need to input the UID and password.


16

SSKCloud

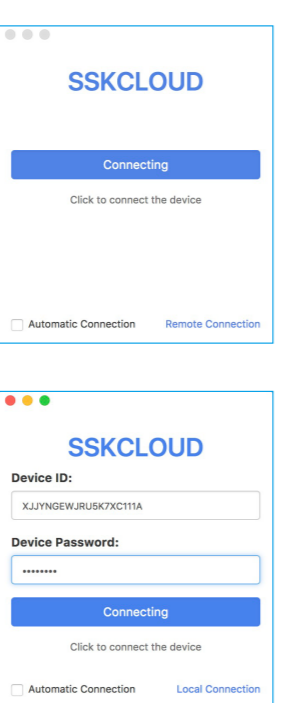


17

The way to get the UID number via the SSKCloud Mobile Device App:

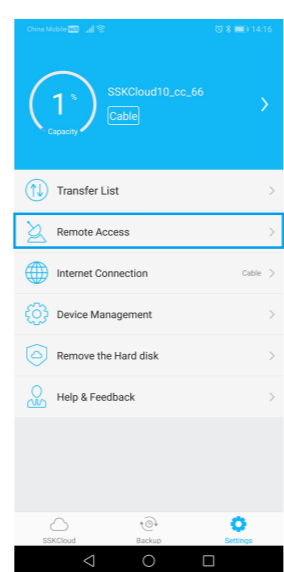

18

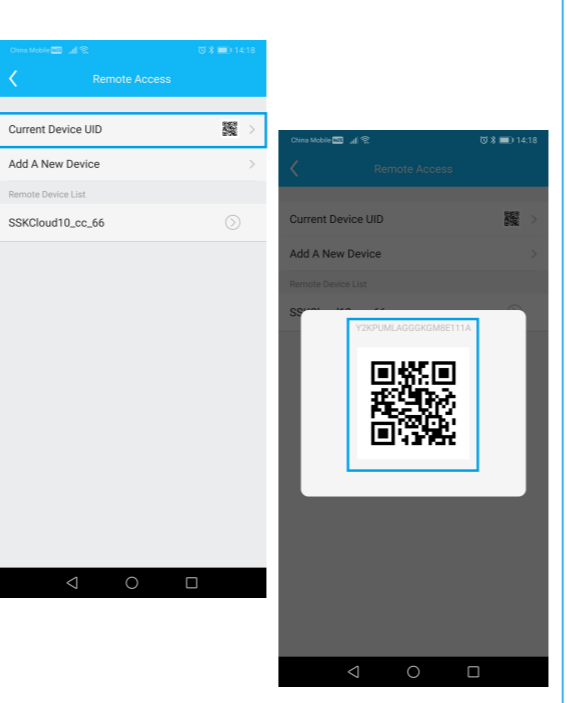

19


3. Wireless Connect PC to SSM-F200 by Web

- Connect to the SSM-F200's WiFi hotspot;
- Open the Browser, enter the IP Address: //10.10.10.254;
- Input the User name and Password, then access

User name: admin

Default Password: admin

If you set the password via the Mobile phone SSKCloud App, then the password would be the same as what you set in the mobile app.

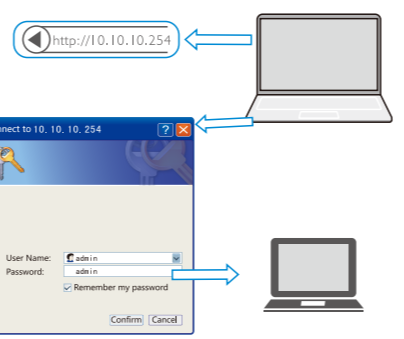


20

Connect SSM-F200 to PC by the USB Cable

Please connect SSM-F200 to PC by supplied USB cable, it will be an USB3.0 external hard drive.

Note: Please don't turn on the device, otherwise it will be wireless hard drive mode.

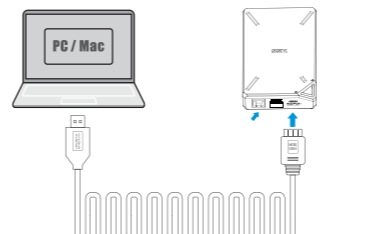

21

TIPS AND FAQs

1. How to Turn on/off SSM-F200?

(1). Push the Power button 5-6 seconds, the LED Indicator turns blue, the drive is ready to connect.

(2). We recommend that you click "Remove Safely" in SSKCloud App and then turn off your hard drive to ensure data security.

(3). Hold the Power button for around three seconds until the LED turns off.

2. Why hard drive can not be recognized by computer or on mobile phone App home page, Hard Disk Capacity shows "0"?

Answer: For the brand new hard drive, it may not be recognized. So in setting up SSM-F200 wireless connection or connecting it to the computer for the first time, do not turn it on, please connect it to computer with the supplied USB cable, and format it. (How to format the hard drive, please refer to our official website: Support-- Download Center)

3. What is the default password you use to connect to the SSM-F200 the first time?

22

Answer: There is no Wifi password. Once you set the user password (while using the Mobile App for the first time) the WiFi password will be the same as the user password you set. The administrator password will be changed to the same password you set in the mobile phone App. Please set and change the password via the mobile app, not via your computer.

4. How to restore factory settings if forget the password?

Answer: Press "RESET" button for more than 5 seconds while the power is on.

5. Will the data be lost after restoring factory settings?

Answer: No, it won't. "Reset will only clear the password and network settings.

6. What do you do if auto-backup is stuck on calculating?

Answer: Please check your WiFi connection. If disconnected, please reestablish the connection.

7. When using auto-backup for iPhone/iPad photos, it creates the backup folder in the App but the folder is empty or shows less photos than your phone?

Answer: For IOS, if hard drive is not connected to the internet, it only back up iPhone local photos, so sometimes back up photos less than iPhone or no back up photos is because of the photos are stored in

23

icloud. If want to backup all the photos, please ensure that the hard drive is connected to the internet first.

8. Why Mac or Windows OS Computer cannot wireless access to Hard drive via Samba?

Answer: If you input the IP Address: 10.10.10.254, please check whether computer has connected the SSKCloud's WiFi hotspot or not. If you connect Router's WiFi, please connect SSM-F200 to Router via a Lan cable, and then replace the IP address 10.10.10.254 with WAN IP address.

9. I have saved a lot of music in the hard drive, but why can't play them continuously via SSKCloud App?

Answer: Please save the music to SSKCloud default Music folder, then you can play the music continuously. In order to have a better and faster experience, App has several default folders, please put the data in the corresponding folders so that the app Menu (photos, videos, music and documents) will scan and display the data of these folders accordingly. If you create your own folder, it will not appear on the menu, you can still access on App, please click on the App-Hard Disk.

10. How do you upgrade the firmware?

Answer: The SSM-F200 can automatically check for a firmware upgrade if connected to the internet. You will see an upgrade reminder when there is a new firmware push.

11. How do you manually upgrade the firmware?

Answer: If you find that there is new firmware on our website but the SSM-F200 didn't push the upgrade automatically, then you can upgrade it manually. Please visit the SSK official website to download the firmware and steps:

If you have an issue not addressed in this manual, please contact us by email at: support@ssk.cn.

Thank you for your purchase!

